

Step 1:

Open the zipper at the back of bottom, put 6 plastic boards into the bottom, then close the zipper.

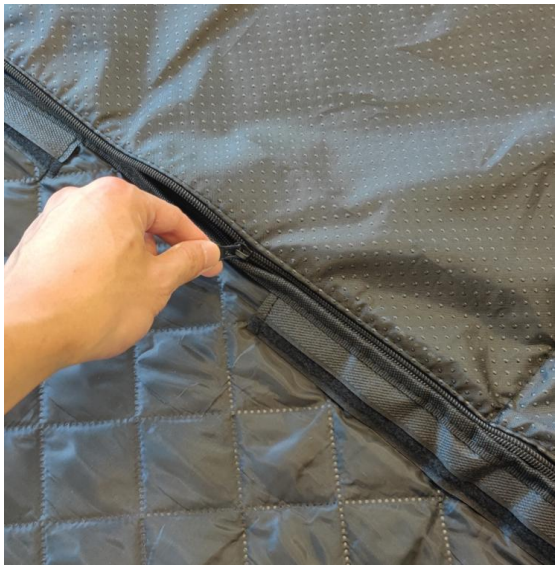

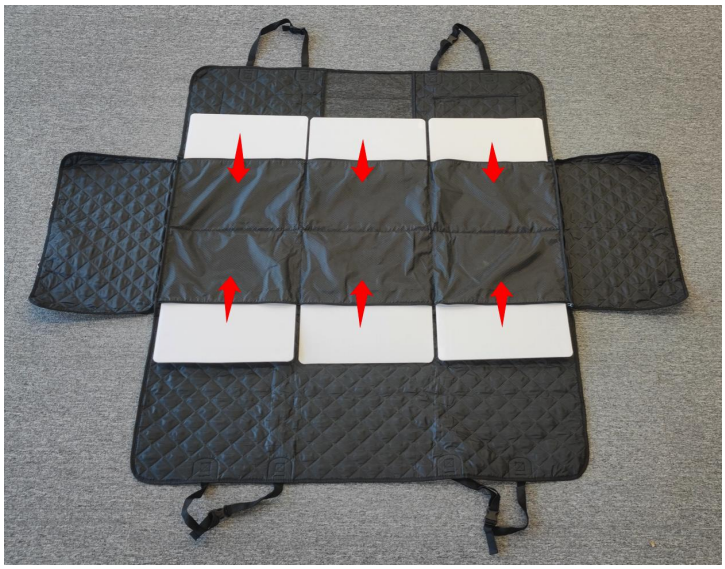

Step 2:

Put these two fixators into the gap of backseats.






Step 3:

Put these four straps around the headrests of front seats and backseats, and adjust to appropriate length.








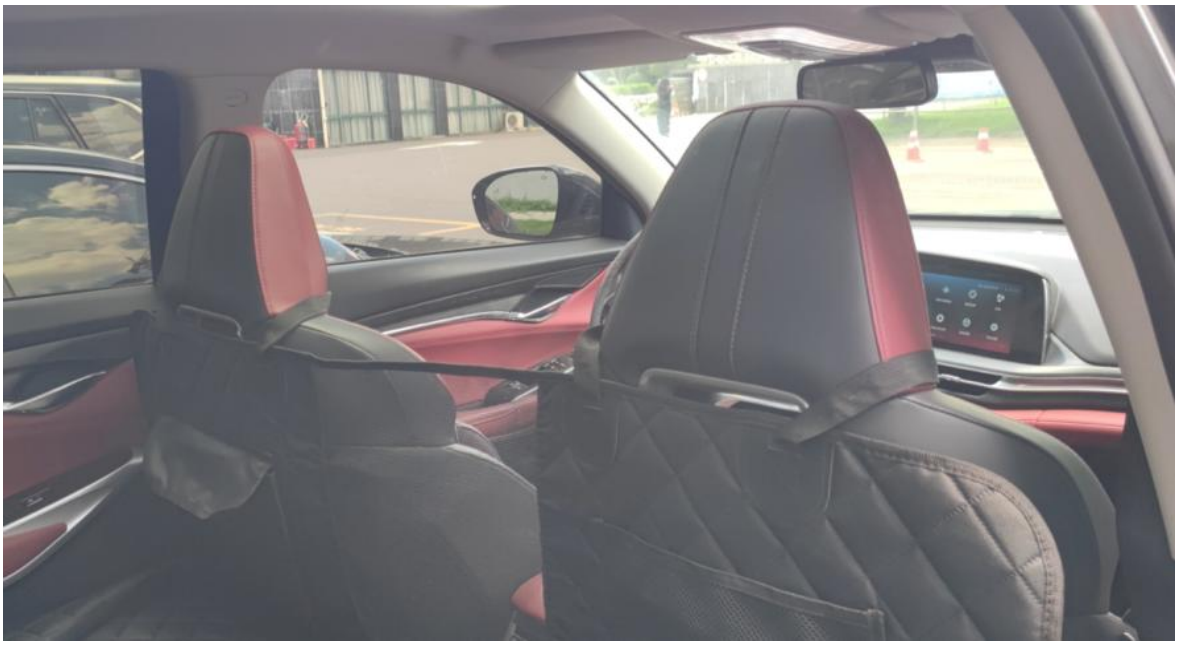

Step 4:

Open the velcro and take out the seat belt buckles, then fasten the seatbelts if needed.

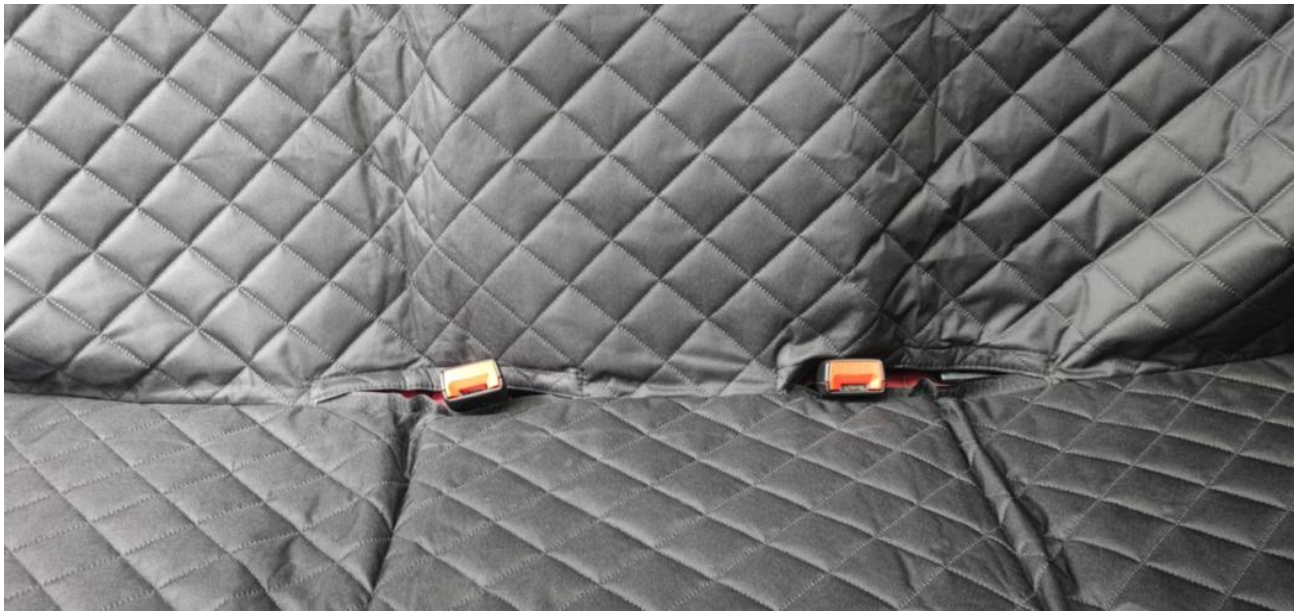



Step 5:

Hang the side faces on the handles of backseat, and adjust to appropriate length.





Step 6:

Close all zippers. Finished.



