

Material / Application

BARDOLINE® DETAIL STRIP asphalt shingle roll is a bitumen based detail roll used to finish the edges of the ridge and verge of a roof.



Benefits

- Waterproofing
- Aesthetic
- Easy to install
- Lightweight
- Durability

Technical characteristics

Width (mm)	300 (- 1%)
Height (mm)	7500 (- 1%)
Mass per unit area	4,0 (±10%)
Watertightness (Method A) (kPa)	≥ 10
Tensile Resistance MD/CMD (N/5cm)	300 / 200 (±20%)
Elongation MD/CMD (%)	2 / 2 (±1)
Resistance to Static Loading (Method A) (Kg)	≥10
Resistance to Impact (Method A) (mm)	≥700
Resistance to Tearing (Nail Method) MD/CMD (N)	70 / 70
Shear Resistance of Joints (N/5cm)	NPD
Flexibility at Low Temperatures (°C)	≤0
Flow Resistance at High Temperatures (°C)	≥110
Durability: Flow Resistance at High Temperatures, after Thermal Aging (°C)	≥100

FIRE PERFORMANCE

External fire resistance EN 13501-5	Froof
Reaction to fire EN 13501-1	F



Colours




Black

Packaging

Qty / pallet	45
Pallet weight	1068 kg

Storage

BARDOLINE® DETAIL STRIP should be kept under dry conditions, protected from UV and heat as well as rain and moisture.

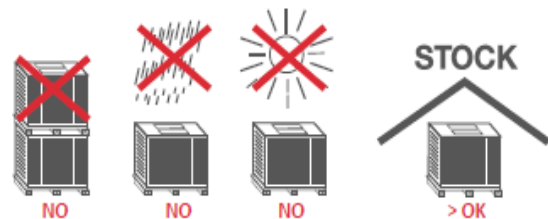

Warranty

All the claims will be considered with respect to application recommendations issued by Onduline company.

This TDS was made based on currently available information. The producer can update the technical data sheet without notice. Product was made in accordance with above mentioned parameters, but producer/distributor can't anticipate any future change as well as change of regulations. It is the consumer's responsibility to use the product in accordance to producer/distributor recommendations and his needs.