
Content



Installing Your New ScanSeat Toilet Seat

please read the manual carefully before installing the toilet seat

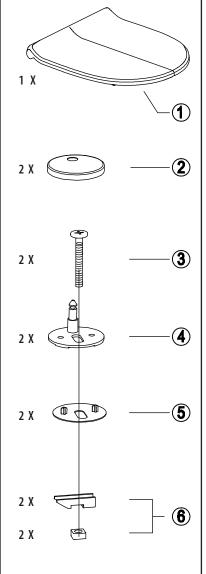

Assemble the bolts and hinges and insert them into the mounting holes in the toilet




Lift up the hinge base and tighten the screws loosely with a screwdriver




Position the locking bolt correctly Click the seat onto the hinges Close the seat and adjust to desired position, then open and remove the seat




Tighten the bolts firmly and make sure the nut is positioned correctly Remove the seat and place the cove cap on the hinge base and press in place Click the seat back into place



Enjoy your new quality toilet seat.



Easy push



Easy lift