
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name	e or trade mark:	Nordlux			
Supplier's addre	ess: Nordlux A/S,	Østre Havnegade 3	4, 9000 Aalborg, DK		
Model identifie	r: 2115053003				
Type of light so	urce:				
Lighting techno	logy used:	LED	Non-directional or directional:	DLS	
Light source cap	o-type	-			
(or other electri	ic interface)				
Mains or non-m	nains:	NMLS	Connected light source (CLS):	No	
Colour-tuneable	e light source:	No	Envelope:	-	
High luminance	light source:	No			
Anti-glare shield	d:	No	Dimmable:	Yes	
		Product para	meters		
Parameter		Value	Parameter	Value	
		General product p	T	I	
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		4	Energy efficiency class	F	
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		320 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700	
On-mode power (P <sub>on</sub> ), expressed in W		3,2	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the second decimal	0,00	
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80	
Outer	Height	120	Spectral power	See image	
dimensions without	Width	780	distribution in the	in last page	
without	Depth	35			

separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity	0,463			
		coordinates (x and y)	0,420			
Parameters for directional light sources:						
Peak luminous intensity (cd)	5 563	Beam angle in degrees, or the range of beam	41			
		angles that can be				
		set				
Parameters for LED and OLED light sources:						
R9 colour rendering index value	0	Survival factor	1,00			
the lumen maintenance factor	0,95					

(a)'-': not applicable; (b)'-': not applicable;

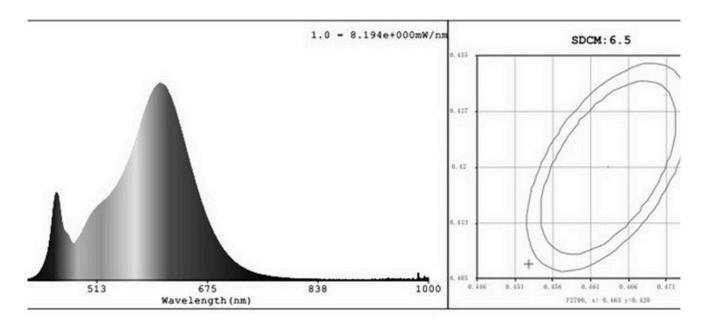

## netric Parameters

sity Coordinate: x = 0.4525 y = 0.4073 / u' = 0.2592 v' = 0.5250 (duv=-5.81e-04)

80K Prcp WL: Ld=584.0nm Purity=58.1%

Lp=605nm FWHM: =111.5nm Ratio:R=24.6% G=72.8% B=2.6%

dex: Ra = 82.3

R2 =93 R3 =93 R4 =80 R5 =82 R6 =93 R7 =80

R9 = 5 R10=85 R11=80 R12=78 R13=84 R14=97 R15=73

NSI\_2700K

## netric & Radiometric Parameters

2.02 lm Eff.: 116.80 lm/W Fe = 1.1423 W

## al parameters

V I = 0.3700 A P = 3.185 W PF = 1.0000 F=0.00 Hz 频率=0.00 Hz