Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Nordlux

Supplier's address: Nordlux A/S, Østre Havnegade 34, 9000 Aalborg, DK

Model identifier: 2115053001

Type of light source:


Lighting technology used:	LED	Non-directional or directional:	DLS			
Light source cap-type	-					
(or other electric interface)						
Mains or non-mains:	NMLS	Connected light source (CLS):	No			
Colour-tuneable light source:	No	Envelope:	-			
High luminance light source:	No					
Anti-glare shield:	No	Dimmable:	Yes			
Product parameters						

Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
0,	mption in on- 100 h), rounded 1st integer	4	Energy efficiency class	F		
indicating if it r in a sphere (3	us flux (фuse), refers to the flux 60º), in a wide in a narrow cone	320 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode p expressed in W	oower (P _{on}),	3,2	Standby power (P _{sb}), expressed in W and rounded to the second decimal	0,00		
for CLS, expre	ndby power (P _{net}) ssed in W and second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI- values that can be set	80		
Outer dimensions	Height	120	Spectral power	See image		
	Width	780	distribution in the	in last page		
without	Depth	35]	 Page 1 / 3		

separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load					
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-				
		Chromaticity coordinates (x and y)	0,463 0,420				
Parameters for directional light sources:							
Peak luminous intensity (cd)	5 563	Beam angle in degrees, or the range of beam angles that can be set	41				
Parameters for LED and OLED light sources:							
R9 colour rendering index value	0	Survival factor	1,00				
the lumen maintenance factor	0,95						

(a)'-' : not applicable;

(b)_{'-'} : not applicable;

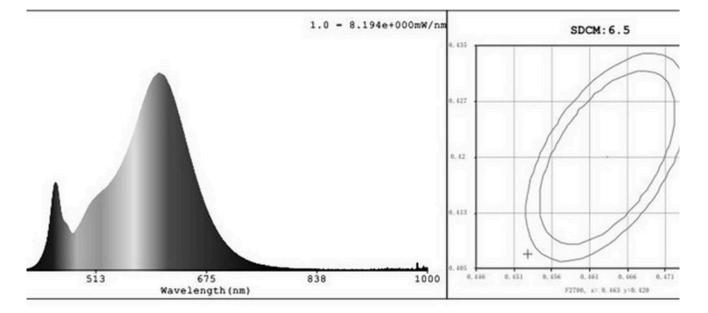

netric Parameters

bity Coordinate: x = 0.4525 y = 0.4073 / u' = 0.2592 v' = 0.5250 (duv=-5.81e-04) 80K Prcp WL: Ld=584.0nm Purity=58.1% Lp=605nm FWHM: =111.5nm Ratio:R=24.6% G=72.8% B=2.6% dex: Ra = 82.3 R2 =93 R3 =93 R4 =80 R5 =82 R6 =93 R7 =80 R9 =5 R10=85 R11=80 R12=78 R13=84 R14=97 R15=73 NSI_2700K

netric & Radiometric Parameters

2.02 lm Eff. : 116.80 lm/W Fe = 1.1423 W

al parameters

V I=0.3700 A P=3.185 W PF=1.0000 F=0.00 Hz 频率=0.00 Hz