

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Nordlux

**Supplier's address:** Nordlux A/S, Østre Havnegade 34, 9000 Aalborg, DK

**Model identifier:** 2115053003

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Led Module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	3,2	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	780	
	Depth	35	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	5 563	Beam angle in degrees, or the range of beam angles that can be set	41
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	0	Survival factor	1,00
the lumen maintenance factor	0,95		

(a): not applicable;

(b): not applicable;

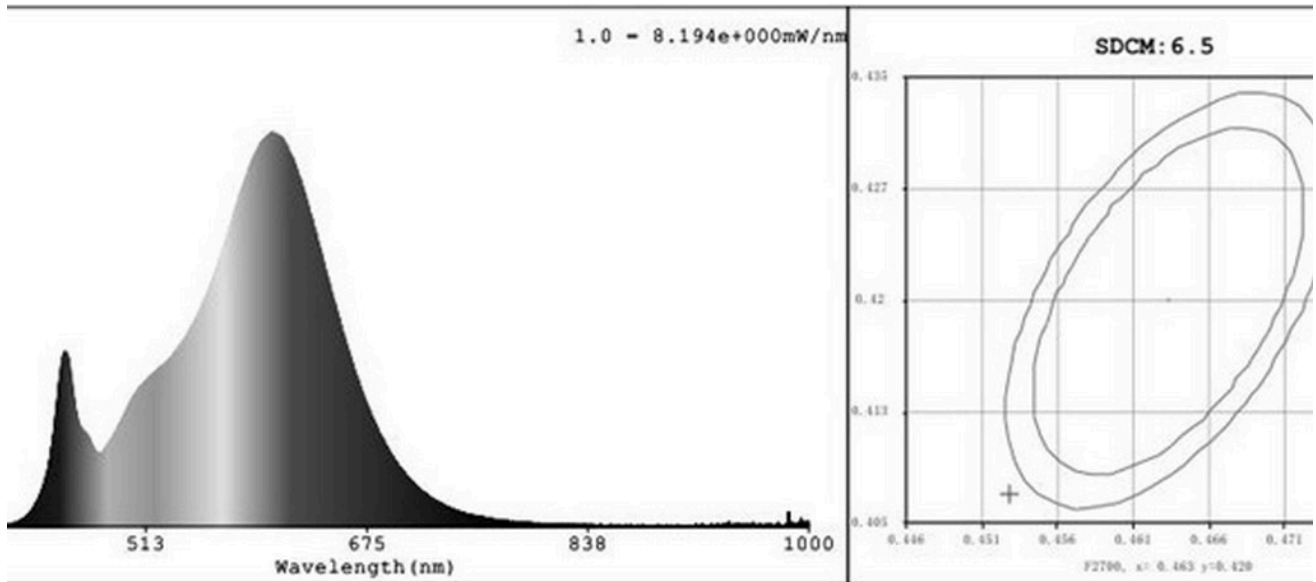

### Colorimetric Parameters

Colorimetric Coordinate:  $x = 0.4525$   $y = 0.4073$  /  $u' = 0.2592$   $v' = 0.5250$  ( $duv = -5.81e-04$ )

80K Prcp WL:  $L_d = 584.0\text{nm}$  Purity=58.1%

$L_p = 605\text{nm}$  FWHM: =111.5nm Ratio:R=24.6% G=72.8% B=2.6%

Color Rendering Index: Ra = 82.3

R2 =93 R3 =93 R4 =80 R5 =82 R6 =93 R7 =80

R9 =5 R10=85 R11=80 R12=78 R13=84 R14=97 R15=73

NSI\_2700K

### Photometric & Radiometric Parameters

2.02 lm Eff. : 116.80 lm/W  $F_e = 1.1423\text{ W}$

### Electrical parameters

V I = 0.3700 A P = 3.185 W PF = 1.0000 F=0.00 Hz 频率=0.00 Hz